


minifinder(●)®

MiniFinder® Xtreme

Activation guide

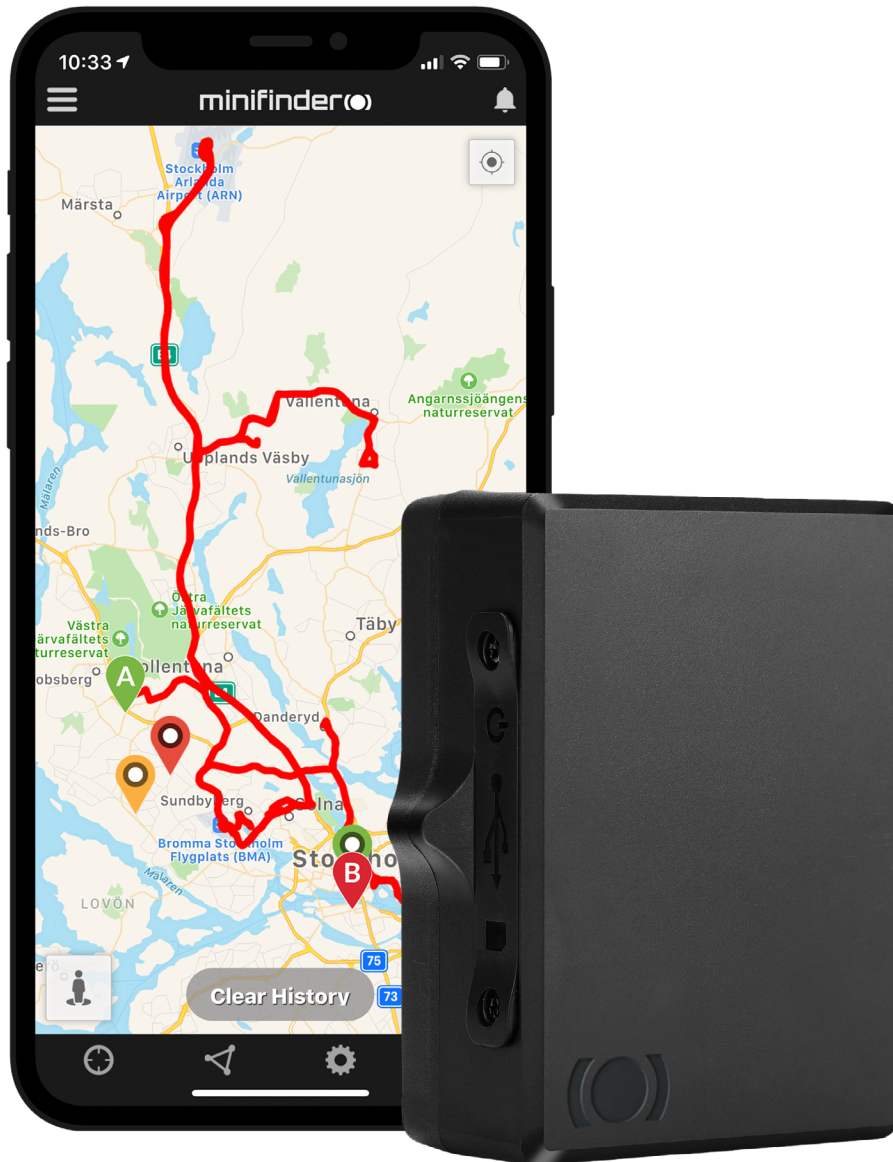

Introduction

The goal of this quick guide is to help you get started with your MiniFinder® Xtreme and live tracking of your asset via MiniFinder GO Tracking System in the shortest possible time.

Package contents

- 1 MiniFinder Xtreme
- 2 Charger



Hardware review

A**B****A**

To charge the battery in the GPS transmitter, connect the power adapter to the device's port.
NOTE! Make sure to have the device turned off during the charging process..

B

Here shows an LED light that indicates the status of the unit in three different colors, red, blue and green.

Charging

For the first time charging, the battery should be charged between 8h to 12h. Next time charging, device is fully charged after approx. 5h.

- A** Connect the power adapter to the device's port. Then, plug the adapter into an electrical outlet to start charging. Remember to have the device in the Off mode while charging is in progress.



Start up

To start Xtreme, pull the lever to the right. When the device is active, the LED light will start blinking, indicating that the device is powered on. Then, securely fasten the cover with the included screws.



Off




On

NOTE! If you have received a login information for the APP from MiniFinder, please skip the device registration steps 1 and 2 below.

Device registration

1

Visit my.minifinder.com to create your account and activate your device.

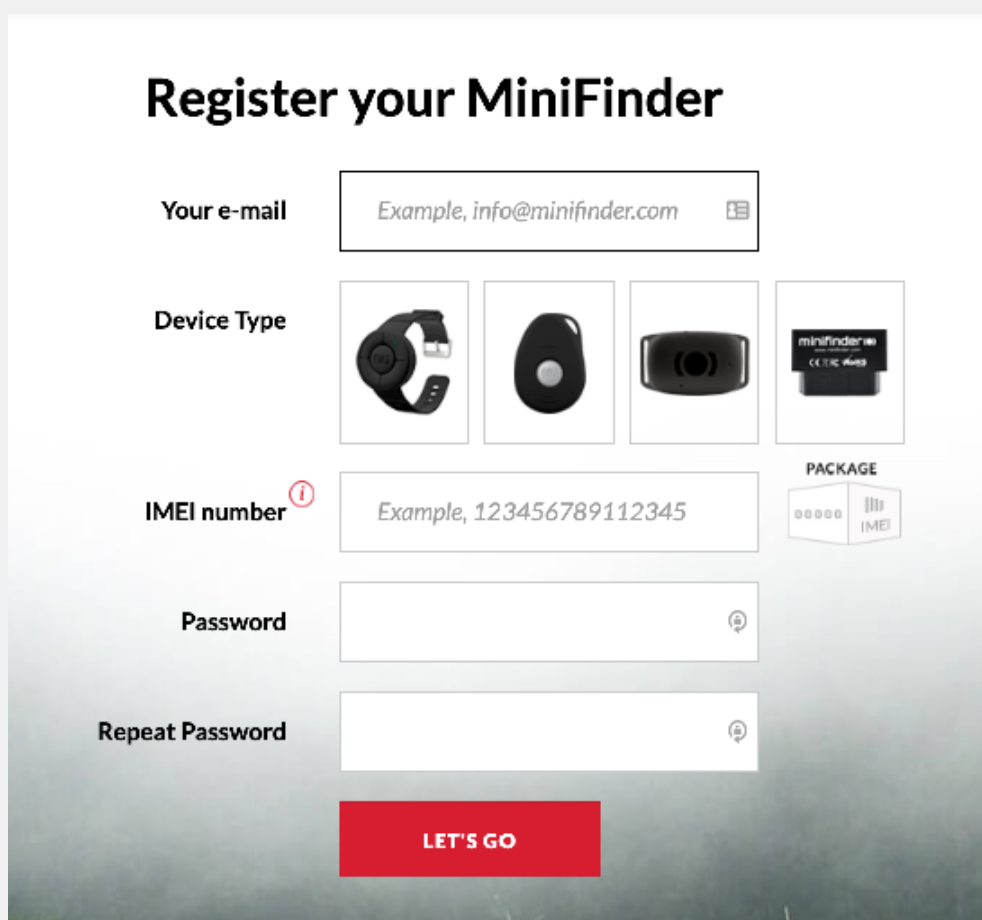

The screenshot shows the 'Register your MiniFinder' web form. It includes fields for 'Your e-mail' (with an example), 'Device Type' (with four icons: a wristwatch, a button, a small black device, and a package), 'IMEI number' (with an example and an information icon), 'Password', and 'Repeat Password'. A red 'LET'S GO' button is at the bottom.

Register your MiniFinder

Your e-mail:

Device Type:    

IMEI number ⁱ: 

Package: 

Password:

Repeat Password:

LET'S GO

2

Before starting the tracking for the first time, please make sure to place the device outdoors for 3-5 minutes for faster fixing against GPS satellites. Start the device by connecting the supplied micro USB cable to it.

Get started with tracking

Follow the instruction steps below to get started with tracking.


Before you start tracking, make sure to place the device in a suitable location where there is good GPS reception i.e. in a vehicle or outdoors with open sky.

1. Live tracking via MiniFinder GO

Log in to <https://go.minifinder.com> with your login details or download the MiniFinder GO APP from the Apple App Store or Google Play. Start the app or open your browser to log in.

Here is how to track through web browsers on your computer:


Select (1) Monitoring in the top menu and (2) then click on your device to display its (3) real-time position on the map.

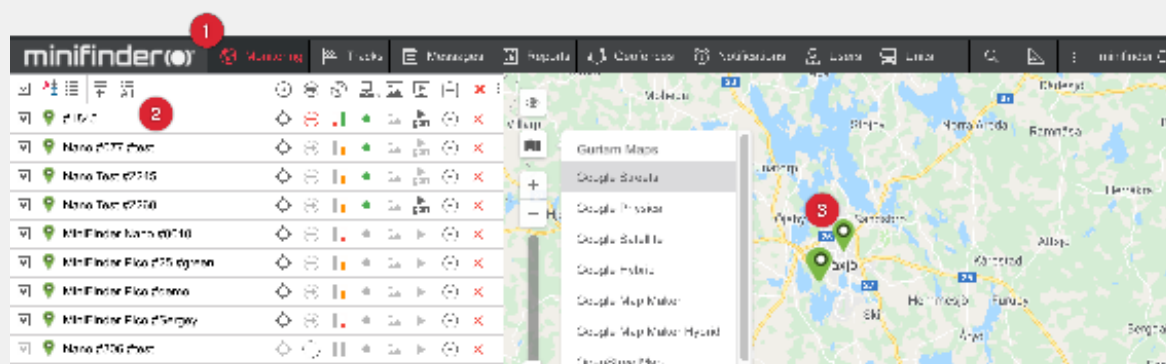


2. Live status

Hover over the unit (step (3) in the image above) for more information of the GPS Tracker. In the picture below, we have marked vital information that appears in the box.

1. The latest location
2. Speed
3. Altitude
4. Satellites locked
5. Latitude & longitude
6. Battery voltage. Fully charged units have 4.12V or more. Low battery is less than 3.55V.

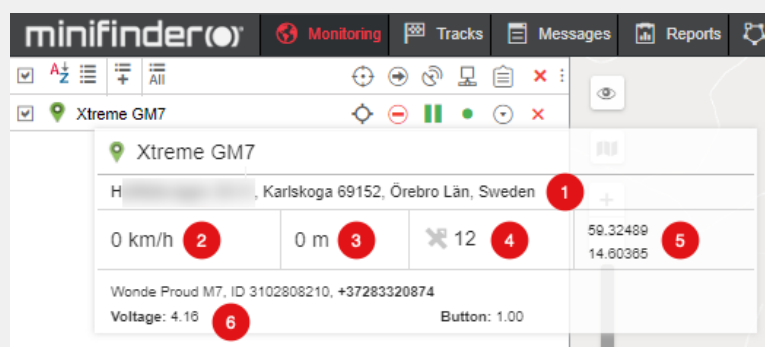


3. Low battery alarm

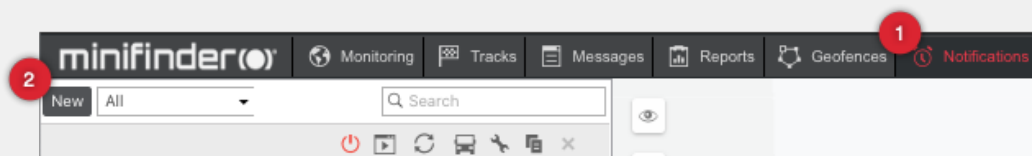

- A. In MiniFinder GO, click on Notifications (1) > New (2)
- B. Select the device that you want to get a low battery alarm and click Next.
- C. Select "Parameter in a message" and click on Next.
- D. Select parameter "voltage". Enter "Value from: 3.7", "Value to: 6". Select "Enable Outside Values" and click Next and Next again.
- E. Select "Notify by e-mail" and enter your email address to receive the alarm. Click Next.
- F. Confirm notification text, then click Next.
- G. In the name field, type: Low Battery Alarm and finally click OK.

4. Dismantling alarm

If the GPS Tracker is attached to a metal object, the "Function key" at the bottom of the unit will be pressed. When an unauthorized person moves the unit and "Function key" is activated and an alarm is sent to you via e-mail.

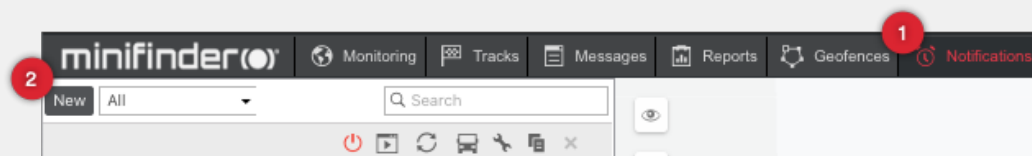


- A. In MiniFinder GO, click on Notifications (1) > New (2)
- B. Select one or more devices and click Next.
- C. Select "Parameter in a message" and click on Next.
- D. Select parameter "button". Enter "Value from: 1", "Value to: 1". Select Trigger when "out of range", then click Next.
- E. Select "Notify by e-mail" and enter your email address to receive the alarm. Click Next.
- F. Confirm notification text, then click Next.
- G. In the name field, type: Dismantle Alarm and finally click OK.

5. Geofence

GeoFence is a virtual area on the map. In MiniFinder GO, you can draw and set up alarm in the system if your device leaves a defined area.


5.1 Create a Geofence area

At the top menu, click Geofences, and then click New.

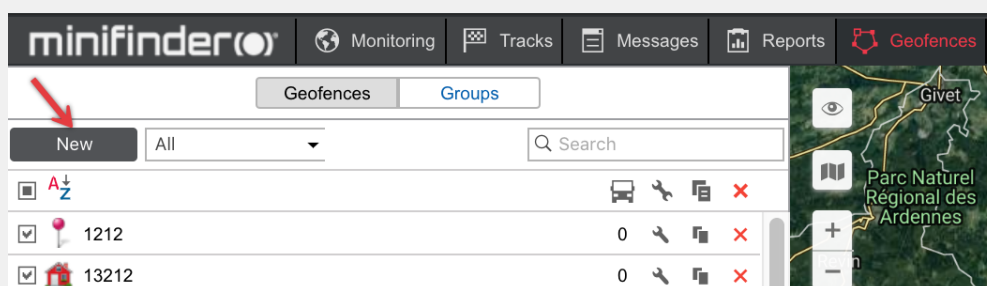


File in a name (1) for your Geofence, follow the Help window and double-click on the map (2) to draw a defined area.


When you are done with the virtual areas on the map, click "Save"(3) button.

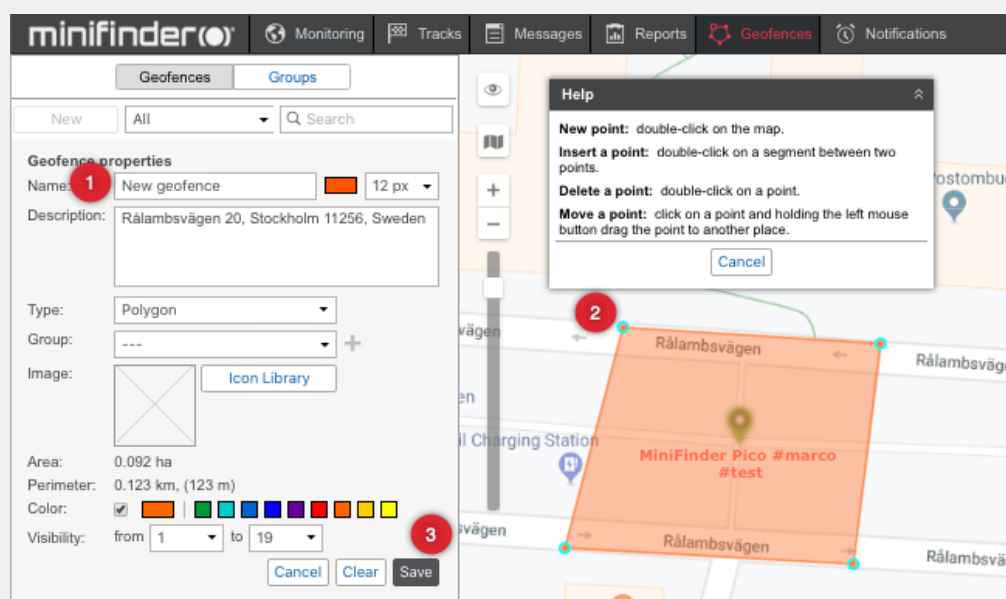

5.2 Create geofence alarm notification

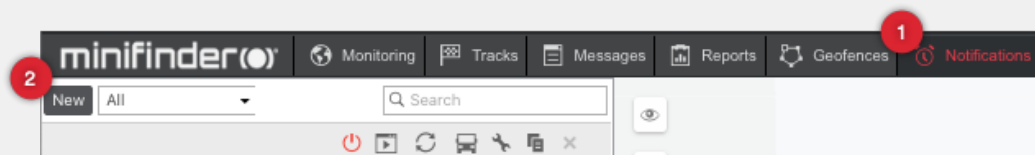

- In MiniFinder GO, click on Notifications (1) > New (2)
- Select one or more devices and click Next.
- Select "Geofence" and click on Next.
- Select "Outside geofence" and choose Geofences. Then click Next.
- Select "Notify by e-mail" and enter your email address to receive alarms. Click Next.
- Confirm notification text, then click Next.
- Name the notification and click OK to create notification.

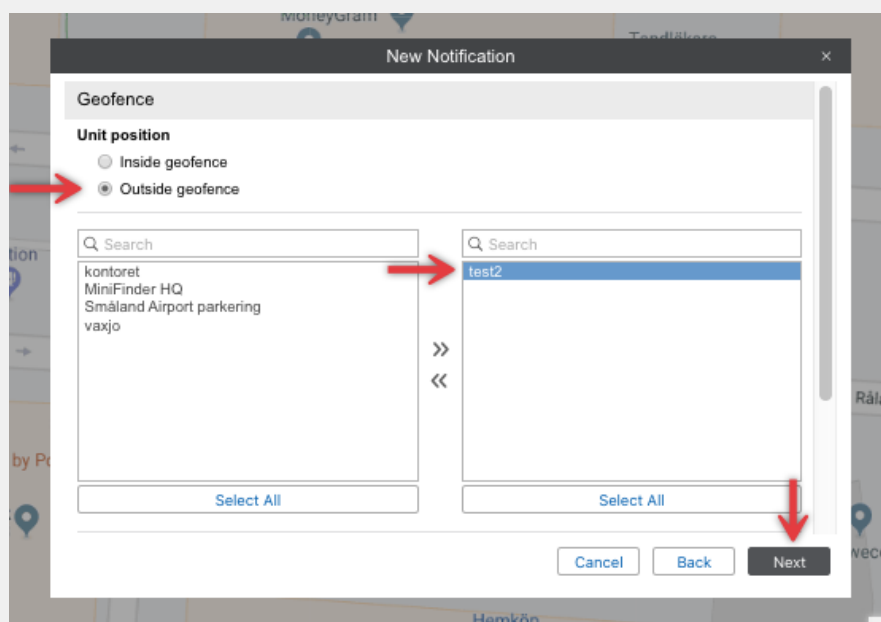

6. MiniFinder Xtreme user guide

For more functions and commands, please download the complete user manual:



[minifinder-xtreme-minifinder-go user guide-en](#)



Support:

support@minifinder.com

Telephone:

0470-786833

Website:

www.minifinder.com